

uRAD Level Sensing

High-performance solution for frontal distance sensing

DESCRIPTION

uRAD level sensing solution is a **millimeter wave radar sensor** specifically designed to **measure frontal distance** with outstanding accuracy. Based on IWR6843AoP and AWR1843AoP chips of Texas Instruments, this sensor is characterized by its accuracy and robustness.


The radar sensor is covered by a **PLA case** with a hyperbolic design in the inside to **focus the beam** in the frontal direction. The case is surrounded by an aluminium metallic tape to avoid any undesired radiation at wide angles.

There are two options (60 and 77 GHz) to choose according to the RF regulations.

APPLICATIONS

This sensor is easy to integrate thanks to its communication interface, open libraries and simplicity to use. Therefore, you will be able to develop level sensing applications for many industry sectors:

- OIL MANUFACTURING PLANTS
- WATER TREATMENT
- PAPER AND PULP PRODUCTION DIVISIONS
- PETROCHEMICAL AND CHEMICAL MAKING & REFINERY
- WASTE MATERIAL HANDLING INDUSTRY
- BEVERAGE AND FOOD MANUFACTURING FACTORIES
- PHARMACEUTICAL PROCESSES
- POWER GENERATION PLANTS

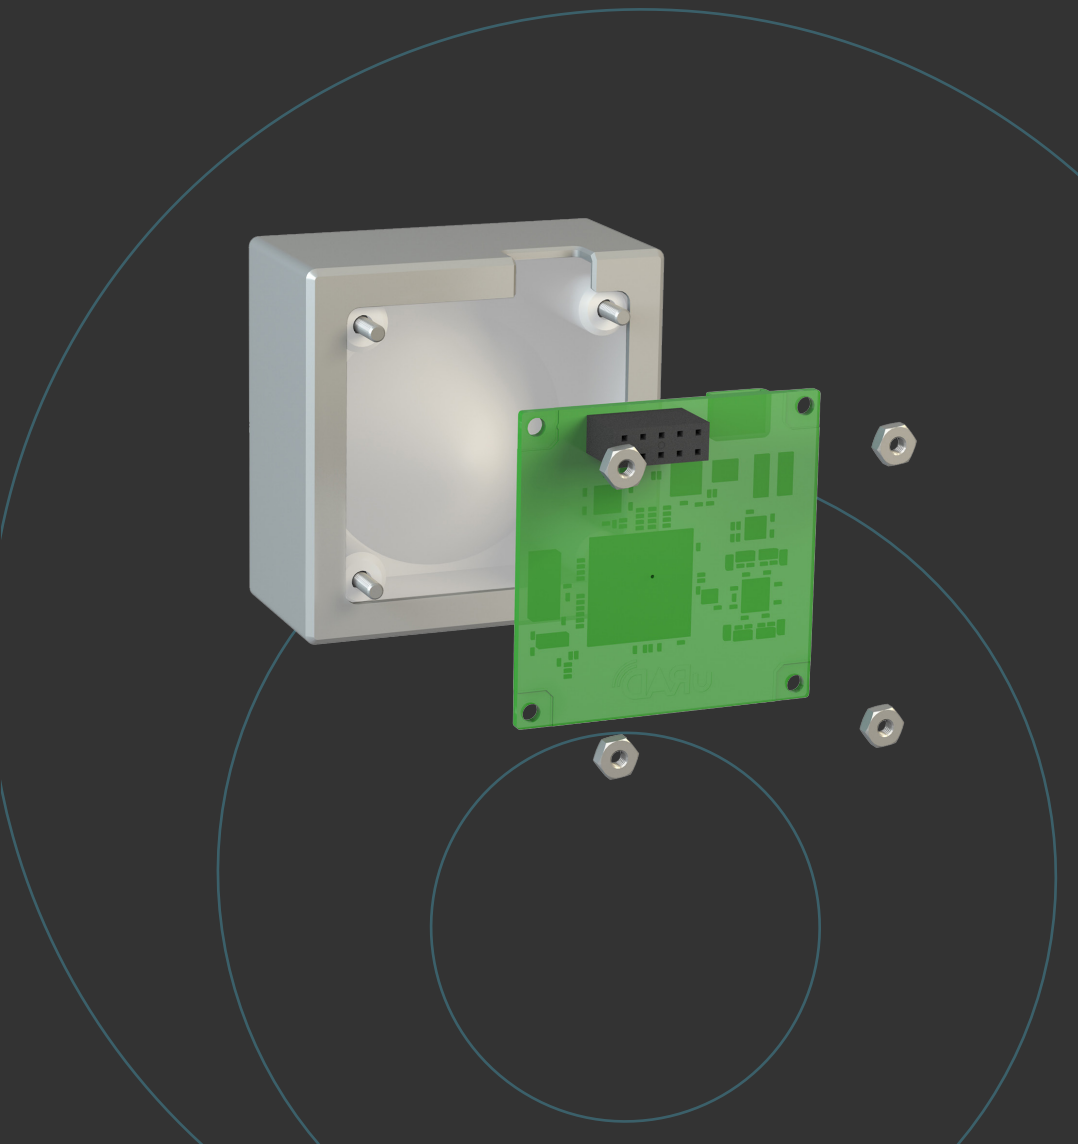


OPERATING CONDITIONS

Parameter	Typical value
Supply voltage	4.5 - 5.5 V
Supply current	140 mA
Digital signals	3.3 VV
Operating temperature	-20 to +85 °C

PERFORMANCE


Parameter	Typical value	Notes
Frequency range:		
Option 1	60 - 64 GHz	IWR uRAD model
Option 2	77 - 81 GHz	AWR uRAD model
Range	0 to 150 m	
Accuracy	1 mm	
Field of view	6 x 6 deg	

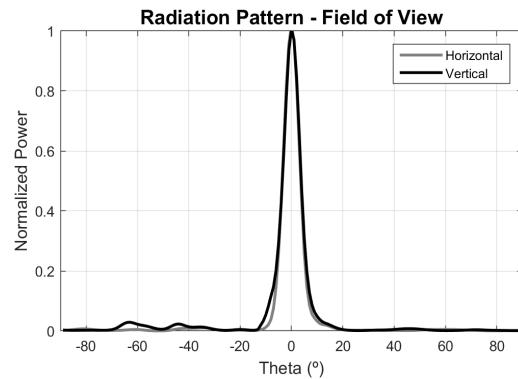

DIMENSIONS

Parameter	Typical value
Dimensions	55.5 x 55.5 x 28.5 mm
Weight	41.4 gr

OUTLINE

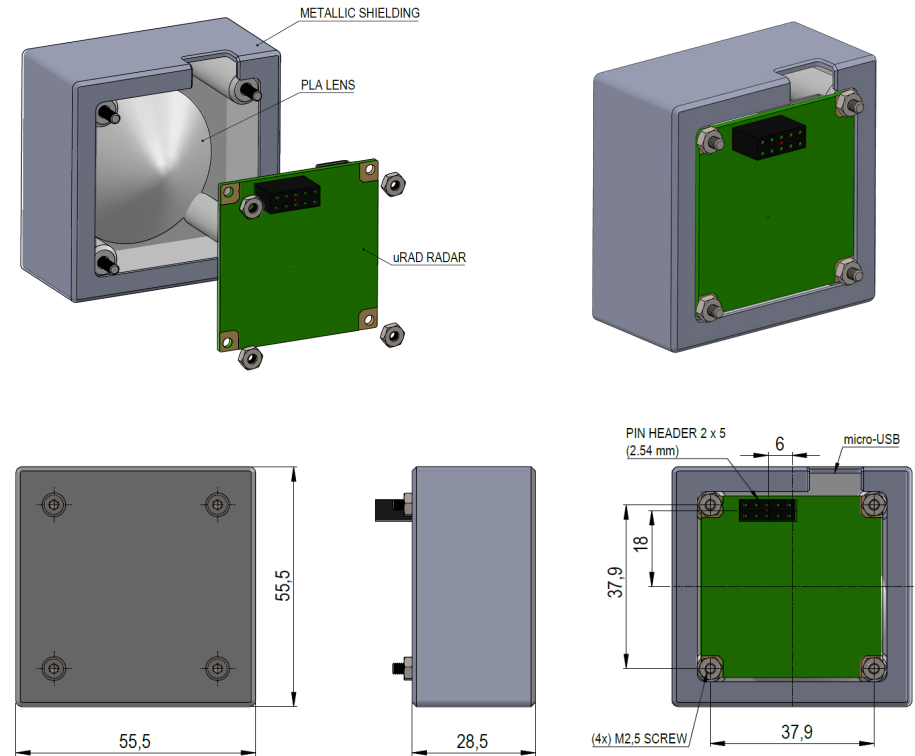

SOFTWARE AND FIRMWARE

The radar board is flashed with a specific firmware that takes advantages of all capacity of the millimeter wave radar sensor.


With the purchase, a full user manual and open libraries in Python and C++ are delivered.

The software also includes a Graph Visualizer for helping in the calibration and set-up.

COMMUNICATION

The board has two different connections:

- Micro USB connector: power, upload firmware, send configuration, receive data.
- Female 14-Pin header connector: power, send configuration, receive data, reset, GPIOs and SPI.

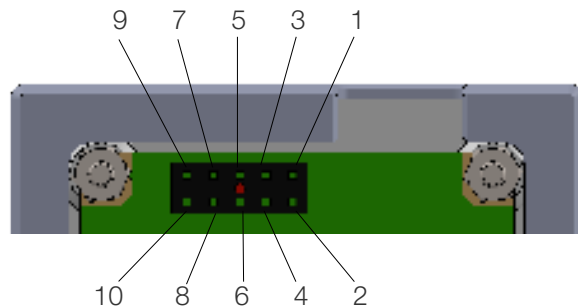



- 1: GND
- 2: 5V
- 3: UART TX config
- 4: UART RX config
- 5: UART TX data
- 6: UART RX data
- 7: Reset
- 8: ON/OFF
- 9: GPIO1
- 10: GPIO0

Last version: 15/12/2022

OTHER

uRAD team, as experts in radar technology, will guide you in the development of your application.

Contact us at contact@urad.es if you want to know more.

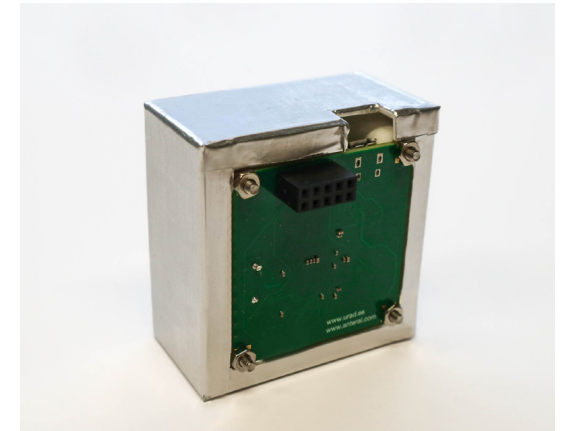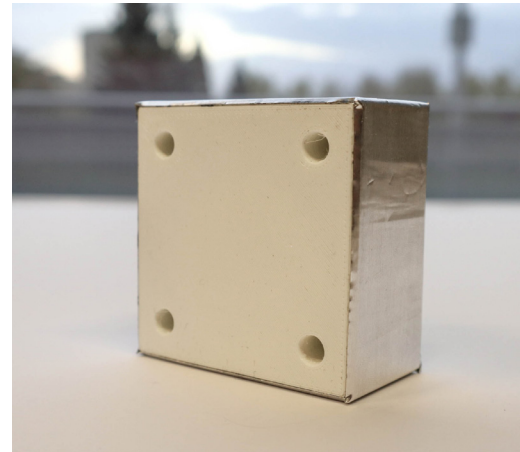

DISCLAIMER

Anteral S.L. 2018. The information contained in this document is subject to change at any time without notice.

Anteral assumes no responsibility or liability for any loss, damage or defect of a product which is caused in whole or in part by:

1. use of any circuitry other than circuitry embodied in a Anteral S.L. product,
2. misuse or abuse including static discharge, neglect, or accident,
3. unauthorized modifications or repairs which have been soldered or altered in the assembly and are not capable of being tested by Anteral S.L. under its normal test conditions, or
4. improper installation, storage, handling, warehousing, or transportation, or
5. being subjected to unusual physical, thermal, or electrical stress.

Anteral S.L. makes no warranty of any kind, expressed or implied, with regard to this material, and specifically disclaims any and all expressed or implied warranties, either in fact or by operation of law, statutory or otherwise, including the implied warranties of merchantability and fitness for use or a particular purpose, and any implied warranty arising from course of dealing or usage of trade, as well as any common-law duties relating to accuracy or lack of negligence, with respect to this material, any Anteral S.L. product and any product documentation. All sales are made conditioned upon compliance with the critical uses policy set forth below.

CRITICAL USE EXCLUSION POLICY: BUYER AGREES NOT TO USE ANTERAL'S PRODUCTS FOR ANY APPLICATIONS OR IN ANY COMPONENTS USED IN LIFE SUPPORT DEVICES OR TO OPERATE NUCLEAR FACILITIES OR FOR USE IN OTHER MISSION-CRITICAL APPLICATIONS OR COMPONENTS WHERE HUMAN LIFE OR PROPERTY MAY BE AT STAKE.

Anteral S.L. owns all rights, titles and interests to the intellectual property related to Anteral S.L. products, including any software, firmware, copyright, patent, or trademark. The sale of Anteral S.L. products does not convey or imply any license under patent or other rights. Anteral S.L. retains the copyright and trademark rights in all documents, catalogs and plans supplied pursuant to or ancillary to the sale of products or services by Anteral S.L. Unless otherwise agreed to in writing by Anteral S.L., any reproduction, modification, translation, compilation, or representation of this material shall be strictly prohibited.