

uRAD Automotive HPA v2.0

77 GHz radar, velocity and 3D positioning

Superior azimuth angular resolution

DESCRIPTION

uRAD Automotive HPA (High-Performance Azimuth) v2.0 is a **millimeter wave radar sensor** which presents outstanding measurement capabilities in a very compact size. Based on the **AWR1843 chip of Texas Instruments**, uRAD detects range, velocity and angle of objects with unprecedented accuracy and robustness.


Working at the **76-81 GHz frequency band**, uRAD exhibits up to three times higher spatial and velocity resolution than others solutions in the market. Connect uRAD and discover the power of radar technology for automotive and smart cities applications!

APPLICATIONS

uRAD is conceived as an evaluation platform to develop new and innovative applications. Leverage the open and free software of Texas Instruments to develop your own projects. You will have access to many laboratories to test different applications from the beginning.

Thanks to uRAD, you will be able to develop and create **applications** as:

- POINTS CLOUD VISUALIZER
- OBSTACLE DETECTION
- AUTOMATED PARKING
- GESTURE RECOGNITION
- LEVEL SENSING
- MEDIUM RANGE RADAR
- ROBOTICS
- TRAFFIC MONITORING
- VITAL SIGNS

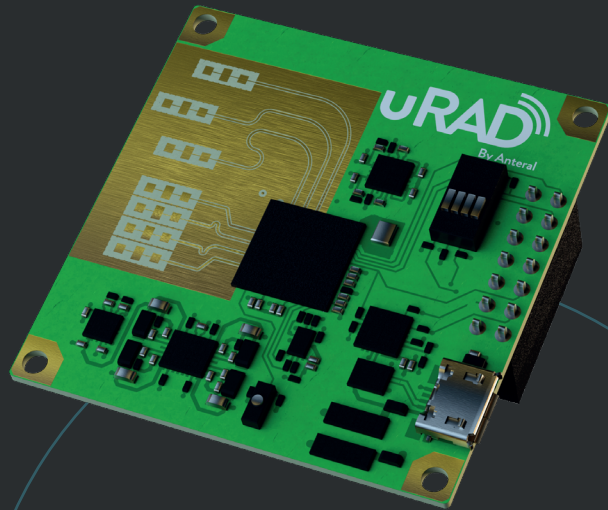

OPERATING CONDITIONS

Parameter	Typical value	Notes
Supply voltage	4.5 - 5.5 V	By USB or 10-pin connector
Supply current	440 mA	Depend on the application
Operating temperature	-20 to +85 °C	




RF PARAMETERS

Parameter	Typical value	Notes
Frequency bandwidth	76 - 81 GHz	
Output power	19 dBm	EIRP (including antenna gain)
Number of transmitter antennas	3	Antenna on PCB
Number of receiver antennas	4	Antenna on PCB
Azimuthal field of view	120	deg
Elevation field of view	40	deg

DIMENSIONS

Parameter	Typical value
Dimensions	45 x 45 x 10 mm
Weight	5 gr

OUTLINE

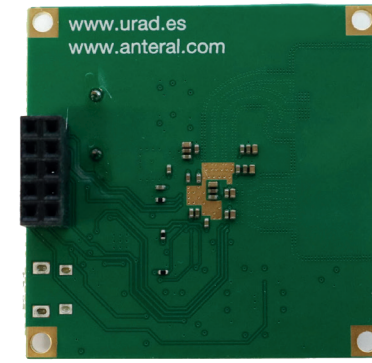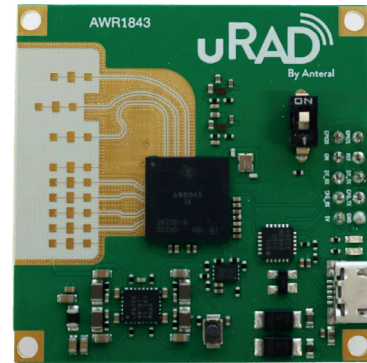

PERFORMANCE

Parameter	
Mode of operation	Frequency Modulated Continuous Wave
Output data	Distance, velocity, angle and SNR (signal to noise ratio)
Distance range	70 m (car), 40m (people)
Distance accuracy	±1 mm
Distance resolution	5 cm
Velocity range	45 m/s
Velocity accuracy	±0.15 m/s
Velocity resolution	0.06 m/s
Angle accuracy	1 deg
Azimuthal angle resolution	15 deg
Elevation angle resolution	58 deg

Distance and velocity range, accuracy and resolution values depend on the configuration parameters of the transmitted waveform.

Resolution indicates the minimum distance, velocity or angle that two targets with similar reflectivity must be separated to be discerned as a single target each one.

OTHER


uRAD team, as experts in radar technology, also develops custom software and firmware to exploit the most out of capabilities of our radars.

Contact us at contact@urad.es if you want to know more about these additional services.

COMMUNICATION

The board has two different connections:

- Micro USB connector: power, upload firmware, send configuration, receive data.
- Female 10-Pin header connector: power, send configuration, receive data, reset, ON/OFF and GPIOs.



- | | |
|-----------------|-------------------|
| 1: GPIO1 | 6: UART RX data |
| 2: GPIO0 | 7: UART TX config |
| 3: Reset | 8: UART RX config |
| 4: ON/OFF | 9: GND |
| 5: UART TX data | 10: 5V |

SOFTWARE AND FIRMWARE

uRAD core is the AWR1843 chip of Texas Instruments. Therefore, you have access to all software and documentation available about it:

- Flash any firmware, including the mmWave SDK by the USB connector.
- Or create your own firmware with Code Composer Studio and upload it.
- Test any already programmed application laboratory in your computer by the USB or 10-pin connector.
- Use (configure and get data) with the USB or 10-pin connector.

Moreover, with the purchase it is also included:

- Standard firmware for point cloud detection.
- Open libraries in Python for configuring and getting results.
- Examples of use.
- Support by our radar experts regarding any doubt you have about radar configuration.

Last version: 02/12/2022

DISCLAIMER

Anteral S.L. 2018. The information contained in this document is subject to change at any time without notice.

Anteral assumes no responsibility or liability for any loss, damage or defect of a product which is caused in whole or in part by:

1. use of any circuitry other than circuitry embodied in a Anteral S.L. product,
2. misuse or abuse including static discharge, neglect, or accident,
3. unauthorized modifications or repairs which have been soldered or altered in the assembly and are not capable of being tested by Anteral S.L. under its normal test conditions, or
4. improper installation, storage, handling, warehousing, or transportation, or
5. being subjected to unusual physical, thermal, or electrical stress.

Anteral S.L. makes no warranty of any kind, expressed or implied, with regard to this material, and specifically disclaims any and all expressed or implied warranties, either in fact or by operation of law, statutory or otherwise, including the implied warranties of merchantability and fitness for use or a particular purpose, and any implied warranty arising from course of dealing or usage of trade, as well as any common-law duties relating to accuracy or lack of negligence, with respect to this material, any Anteral S.L. product and any product documentation. All sales are made conditioned upon compliance with the critical uses policy set forth below.

CRITICAL USE EXCLUSION POLICY: BUYER AGREES NOT TO USE ANTERAL'S PRODUCTS FOR ANY APPLICATIONS OR IN ANY COMPONENTS USED IN LIFE SUPPORT DEVICES OR TO OPERATE NUCLEAR FACILITIES OR FOR USE IN OTHER MISSION-CRITICAL APPLICATIONS OR COMPONENTS WHERE HUMAN LIFE OR PROPERTY MAY BE AT STAKE.

Anteral S.L. owns all rights, titles and interests to the intellectual property related to Anteral S.L. products, including any software, firmware, copyright, patent, or trademark. The sale of Anteral S.L. products does not convey or imply any license under patent or other rights. Anteral S.L. retains the copyright and trademark rights in all documents, catalogs and plans supplied pursuant to or ancillary to the sale of products or services by Anteral S.L. Unless otherwise agreed to in writing by Anteral S.L., any reproduction, modification, translation, compilation, or representation of this material shall be strictly prohibited.